


VP-3000/4000

VACUUM MEMBRANE PRESS

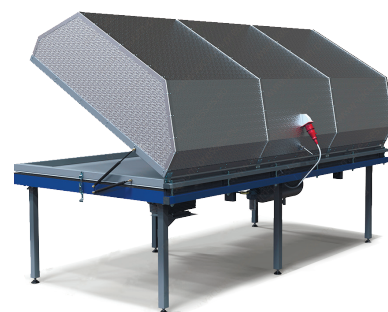

The membrane presses of VP series is optimal solution for woodworking and a furniture production from all types of wood. The vacuum presses are equipped with heating system which allows reduce the time of drying glue and increase productivity of production. The heating temperature monitored and maintained automatically.

Area of application

Veneering:

Using in furniture production, in construction of interior and exterior.

2D Coating:

Coating of simple profiles for furniture and interior.

2D bend-glued parts:

Manufacturing of curved parts.

In standard

Heating system to accelerate drying of glue;
System of temperature control;
Natural rubber membrane;

Work table from 12mm HPL board;
Oil free vacuum pump with capacity 25 or 40 m³/h;

System of vacuum control and automatic pump stop;
Pressure tank 15l.

Technical data	VP-3000	VP-4000	VP-4000W
Working table size, (l x w) , mm:	3000 x 1500	4000 x 1500	4000 x 1800
Heating system temperature max., C:	60	60	60
Heating system, kW:	4.5	4,5	4,5
Pump capacity, kW:	0.75	0,75	1,25
Vacuum pump output , m ³ /h:	25	25	40
Operational vacuum, kg/cm ² , (bar):	- 0,85	- 0,85	- 0,85
Protection level:	IP53	IP53	IP53
Noise level, Db:	<70	<70	<70
Power, V:	3Ph 400V 50Hz	3Ph 400V 50Hz	3Ph 400V 50Hz
Outline dimensions, mm,(l x w x h), mm:	3100x 1650 x 1600	4100x 1650 x 1600	4100x 1950 x 1600
Weight, kg:	450	550	650